


BASIC FEATURES

AGE GROUP: **5 to 12 years old**
 FALL HEIGHT (CSA): **109" (2,8m)** (ASTM): **109" (2,8m)**
 CHILD CAPACITY: **3 children**
 DIMENSION (WT x DT x HT): **2'11" x 0'5" x 9'1" (0,9m x 0,1m x 2,7m)**
 SHOCK ABSORBING SURFACE (CSA): **13' x 15' (4m x 4,6m)**
 SHOCK ABSORBING SURFACE (ASTM): **13' x 15' (4m x 4,6m)**

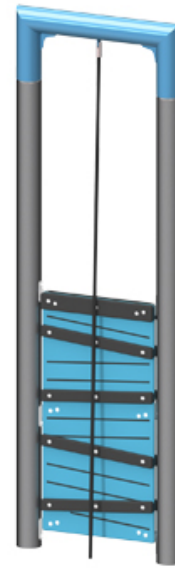

DESCRIPTION

An imposing arch supports a quality climbing cable fixed at both ends. While gripping the cable, you climb like mountaineers by leaning on the angled supports. Practically all the muscles of the four limbs are solicited.

BODY MOVEMENTS



ANCHORING



IN CONCRETE
 This product is anchored to the ground with concrete columns.

MATERIALS

METALS

Post(s): 6061-T6 aluminum alloy tube measuring 5" (127mm) in outer diameter, with 0.125" wall thickness.

Metal frame(s): Made of steel (sv)

Hardware: Made of stainless steel, Anti-vandal type.

COATINGS

Paint: Painted metal parts are white blasted first, then coated with a primer and Z-series polyester powder, which has an extreme resistance to ultraviolet (UV) rays and weather. Our paint also has antibacterial and antiviral properties (lv)

PLASTIC MATERIALS

Plate(s) and panel(s): Panels and other plastic parts are made of HDPE polyethylene colored in the mass and treated against UV rays. All edges are rounded for maximum safety. (lv)

MIXED MATERIALS

Cable (Type 2): These cables are made of galvanized steel and nylon rope. The diameter, depending on the case, 3/4" (20mm) and 7/8" (22mm). Fasteners, lugs and flanges are made of steel and aluminum.

COLOUR CHOICES

Aluminum / Steel



Polyethylene Panels (3/4")



Made at our factory in Lévis, Québec, Canada • Meets CAN/CSA-Z614 and ASTM ASTM F1487